



1304/51920



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

MAILED 19 OCT 2004

WIPO

PCT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Stephen Hordley

Dated

6 August 2004

Request for grant of a patent
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

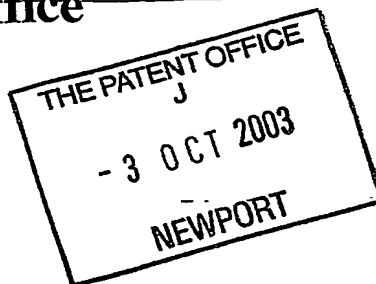

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1.	Your reference	PHGB030177GBP		
2.	Patent application number (The Patent Office will fill in this part)	0323132.1		- 3 OCT 2003
3.	Full name, address and postcode of the or of each applicant (<u>underline all surnames</u>)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS 07419294001 ✓		
	Patents ADP Number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4.	Title of the invention	RADIO SYSTEM WITH RECONFIGURABLE LINKS		
5.	Name of your agent (if you have one)			
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Philips Intellectual Property & Standards Cross Oak Lane Redhill Surrey RH1 5HA		
	Patents ADP number (if you know it)	08359655001 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.

Do not count copies of the same document.

Continuation sheets of this form

Description	10
Claims(s)	3
Abstract	1
Drawings	7

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date 2/10/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815143

D. T. MURLEY

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 01293 815143

DESCRIPTION

RADIO SYSTEM WITH RECONFIGURABLE LINKS

5 The present invention relates to a radio system with user-friendly re-configurable links, a method for reconfiguring the links and devices for providing said links between host apparatus. The present invention has particular, but not exclusive, application to home and portable consumer systems having host apparatus for handling audio/video content, such as
10 portable music/video players, home "Hi-Fi" units, mobile telephones, personal digital assistants/portable computers and the like.

 The installation and configuration of a wireless link between two or more host apparatus is often unduly complicated and may require technical
15 knowledge and understanding of, for example, network topology. It is also often difficult for a consumer to know and keep track of which host apparatus is linked to which in his home, and which host apparatus *may* be linked with which host apparatus.

 It is therefore an object of the present invention to provide user friendly reconfigurable wireless links in a radio system.

20 According to a first aspect of the present invention there is provided a method of configuring a radio link between a first device and a second device, each of which comprises radio means, proximity detection means and timing means, wherein the method comprises said proximity detection means
25 detecting when said first and second device are proximate, timing means detects the duration of proximity and respective radio means configures a link in dependence on said proximity detection and the duration thereof.

 According to a second aspect of the present invention there is provided a system having a first radio device and a second radio device, operable to communicate via a configurable radio link therebetween, each device
30 comprising proximity detection means for detecting when said devices are proximate, timing means for detecting the duration of said proximity and radio

means for configuring a radio link in dependence on said proximity detection and the duration thereof.

According to a third aspect of the present invention there is provided a radio device operable to communicate via a configurable radio link with a second device, the radio device comprising proximity detection means for
5 detecting when said devices are proximate, timing means for detecting the duration of said proximity and radio means for configuring a radio link in dependence on said proximity detection and the duration thereof.

The above aspects provide a radio system in which a user is enabled to
10 easily configure a wireless link between devices.

In a preferred embodiment the link is provided by first and second radio devices, which are portable and can be plugged into, or engaged with
respective host apparatus. The radio devices (or "e-buttons") must be registered with each other in order to enable their respective hosts to
15 communicate via the radio devices over a link therebetween.

Advantageously, the link is established by a user bringing together the first and second devices so that they are physically separated by a centimetre or less. A proximity detection switch within each device is magnetically
operated when the devices are proximate, and a radio micro-controller begins
20 timing the duration of proximity. When the duration exceeds a predetermined duration (for example about 2 seconds), the micro-controller of each device begins the registration process via inbuilt radio transceivers in order to establish a link.

Radio identifiers (either provided within said micro-controllers, or
25 randomly generated by said micro-controllers) are exchanged, and an indication (a flashing LED for example) indicates to the user that the link between the devices is established.

close proximity with each other. The micro-controllers, operating in tandem with the proximity detection means as earlier, exchange identifiers and, in recognising the exchanged identifiers as having been previously exchanged, simply delete said identifiers to disable the registration.

5 Furthermore, in a similar fashion, a single radio device may be registered or associated with many other similar radio devices, enabling "one-to-many" links.

The system provides a simple visual indicator of which apparatus is communicable or linked with another to the user (since the presence of the device engaged with the host apparatus signifies visually to the user the communication capability).

10 Owing to the inventive aspects described above, the configuration of the aforementioned radio links involves the simple action of bringing together the required devices for a few seconds. Of course, the devices operate the same radio protocol and hence enable wireless links to be added to suitably equipped host apparatus from different manufacturers, ensuring interoperability and a simple radio upgrade path as radio standards improve.

Hence a simple, flexible and consumer friendly mechanism for establishing (or cancelling) radio links is provided. The devices operate the same radio protocol, and hence ensure interoperability (between host apparatus of different manufacturers) and provide a simple cost effective radio upgrade path as radio standards improve.

20 The devices may be sold in blister packs, which the consumer may buy at a later date to the purchase of suitable host apparatus, or the devices may be provided with the sale of said host apparatus to offer additional functionality of said apparatus.

30 Areas of application comprise the streaming of an audio stream from, for example, a Hi-Fi system having a first radio device to a remote loudspeaker equipped with a second radio device which was earlier registered with the first device as previously described. The consumer may remove the first device from the Hi-Fi system and plug it into a suitably equipped portable audio player such as an MP3 or Minidisc™ player. Hence, content from the portable player

may also be streamed to a loudspeaker in the home via the wireless link between first and second engaged devices. The first device may advantageously register with other similar devices engaged in other loudspeakers around the home, hence enabling audibility of the audio content throughout the home.

Such first and second radio devices are hereinafter referred to as "e-buttons", whereas the phrase "host apparatus" comprises consumer electronic and computing devices equipped with e-button receiving or engaging means which engage an e-button and provide data to it for output over a radio link.

The present invention will now be described, by way of example only, and with reference to the accompanying drawings in which:

Figure 1 illustrates host apparatus and separate e-buttons,

Figure 2 illustrates host apparatus communicating via engaged e-buttons,

Figure 3 is a schematic diagram showing internal components of an e-button,

Figure 4 is a diagram illustrating steps in the configuration of a link between a first and second e-button,

Figure 5 is a flowchart representing steps in a method for configuring a link between two e-buttons,

Figure 6 is a schematic diagram showing a different arrangement of the internal components of an e-button, and

Figure 7 illustrates the e-buttons of Figure 6 when brought into close proximity.

~~It should be noted that the Figures are diagrammatic and not drawn to scale. Various alternatives and embodiments of some of these Figures have been contemplated and will be apparent to those skilled in the art.~~

Figure 1 shows a first detachable e-button 10a operable to engage with a respective host apparatus 12a, which comprises a socket 14, adapted for receiving the detachable e-button 10a and for providing or receiving data from said engaged e-button. Also shown is a second host apparatus 12b having a similar socket 14 for receiving a respective e-button 10b. In the diagram the e-buttons 10a, 10b are depicted having a distinctive cross-like shape, with the engaging sockets 14 having a similar design to receive e-buttons 10, 10b. Of course, the e-buttons may take many other physical forms.

In the following description, for the sake of simplicity, clarity, and by way of example only, the host apparatus 12a, 12b represent an audio Hi-Fi system and a remote loudspeaker respectively. Of course, the Hi-Fi and loudspeaker may comprise conventional sockets enabling audio connection and output. However, such apparatus 12a, 12b with e-button connection means 14 optionally allow configurable wireless links to be employed, enabling a user to establish and control in a simple, intuitive fashion what is in effect a radio network between chosen apparatus or devices 12a, 12b in his home.

This is illustrated simply in Figure 2, which shows the Hi-Fi 12a communicating wirelessly with the loudspeaker 12b across a previously configured radio link 20 via inserted respective e-buttons 10a, 10b. Figure 2 illustrates the intention that such e-buttons should be visible and recognisable to the user. Hence, the presence of the detachable e-button illustrates the facts that the apparatus has a wireless connection capability.

The configuration of such a link 20 will now be described with reference to Figures 3, 4 and 5.

Figure 3 illustrates in more detail an example e-button device 10a. The device 10a comprises a radio micro-controller integrated circuit or "chip" (such as the well known mc8051 series of micro-controllers), which operates a radio transceiver 32 when sending or receiving radio messages. Such messages are preferably arranged according to a digital radio standard provided in hardware and software of the micro-controller/transceiver architecture. ZigBee (IEEE802.15.4) and the IEEE 802.11 family of radio standards are suitable example radio standards well known to those skilled in the art.

The micro-controller comprises timing means in the form of an internal clock oscillator 34 as is usual with such integrated circuit controllers or microprocessors. The micro-controller in this embodiment has a small amount of internal memory (not shown) for storing program instructions (a radio "stack") and variables (such as device identifiers) relating to the operation of the radio standard, and also for storing program instructions for carrying out method aspects in accordance with the present invention as will be shortly described.

The micro-controller 30 also controls indication means 36 in the form of a light emitting diode (LED) for indicating to a user the status of the e-button. The indication means 36 may also comprise loudspeaker and tone generation circuitry to provide audible indications of the e-button status to the user.

The micro-controller 30 is further connected to proximity detection means in the form of, in this embodiment, a magnetic switch module 38. The module 38 comprises a magnetically activated Reed switch 38a and a permanent magnet 38b. The switch and magnet are arranged such that some of the magnetic field lines emanating from the magnet 38b are perpendicular to the direction in which the switch closes. Hence, the switch experiences a closing force due to the magnet. However, the field strength of the magnet 38b is chosen as to be just insufficient to close the switch 38a. Hence, an increase in magnetic field strength is required for the switch 38a to close and for subsequent detection of the switch status by micro-controller 30.

Figure 4 illustrates in three steps a configuration operation utilising a first and second e-button as described above. Figure 4a illustrates a first e-button 10a separated by more than a few centimetres from a second similar e-button 10b. Respective proximity detecting switch modules are in a default

of this status change (i.e. the time that the e-buttons are held in close proximity of a few millimetres to a centimetre or so). When a pre-programmed time limit is exceeded (in the range 1-10s, preferably about 2s) the micro-controllers 30 then begin a registration or pairing process.

5 The exact details of such a process depend on the specific radio standard employed, but typically such processes involve the exchange of radio device identifiers, so that future messages can be addressed to a specific device having said identifier. Hence, an e-button or device identifier is either randomly generated, selected from a stored list or retrieved if the identifier is
10 pre-programmed and unique. For example, the ZigBee scheme provides for IEEE defined unique, hard-wired 48 or 64-bit identifiers. Such registration processes may also involve a limited amount of pre-programmed service or capability data to be exchanged.

 When the registration process is complete, the indication LED 36 (under
15 control of micro-controller 30) preferably indicates the successful completion of the exchange to the user, thereby signifying the configuring of a link between the first and second e-button. For example, the LED may flash when proximity is first detected and, following the predetermined time period and exchange, then remain on following successful exchange. Of course, the LED may be
20 controlled by the micro-controller to signify the status to the user in other ways, and other audible or vibration means may be incorporated depending on a manufacturers cost options.

 Following the indication, the user simply physically separates the two e-buttons as shown in Figure 4c, the switches open and the paired e-buttons
25 may be engaged with the Hi-Fi and loudspeaker (for example) to provide a wireless link therebetween.

 Suppose that the user, at some future date, decides to pair the first e-button 10a with another or further e-button. He may simply repeat the process shown in Figure 4, thereby creating a one-to-many link regarding the first e-
30 button and several other e-buttons.

 Conversely, to delete or cancel a link already established between two e-buttons, the user simply repeats the steps of Figure 4 with the required e-

buttons. In this instance the micro-controllers 30 check the exchanged identifier with those already received and stored. Should a match be found, the micro-controller deletes the exchanged and stored identifier thereby severing the link. Hence, an automatic deregistration (or "un-pairing") process is provided requiring no more steps than already described for the user.

Optionally, the indicator LED 36 may also indicate to a user that a link already exists during the predetermined time-period. Hence, a user may check whether an e-button is linked with another by bringing them together, and should the LED signify the existence of such a link, the user then separates the e-buttons before the registration (or de-registration) process begins.

Figure 5 illustrates generally the process steps described above, and followed by an e-button micro-controller suitably programmed. In a first step 50, proximity is detected (DET_PROX), following which the micro-controller begins monitoring at step 52 for the expiration of the predetermined time period (TP_EXP?). When the period is ended, and proximity is still detected, program flow follows to step 54 in which the e-button identifiers are exchanged (EX_ID). The micro-controller then checks at step 56 whether the received identifier is already known (NEW_ID?) to it, and if so follows path 57 to achieve deletion of the identifier at step 58.

In the event that the check at step 56 reveals that the identifier is new, then the micro-controller stores (STO) the identifier at step 60, performs other operations related to registration and establishment of a link with the e-button providing the identifier, and finally returns at step 62 to monitoring for proximity detection.

~~The indication steps of the process are not shown in Figure 5, but those skilled in the art will appreciate that the micro-controller may be programmed~~

~~to provide an indication of the process steps and the status of the micro-controller~~

~~and the status of the micro-controller.~~

~~It is to be understood that the above description is intended to illustrate~~

Figure 6 shows an e-button 10c as before except that the proximity-switching module 38 is arranged differently. In this device embodiment, the magnet 38d is of sufficient strength to close the switch 38c, but is disposed in relation to the switch 38c such that the magnetic field lines emanating from the magnet 38d are parallel to the direction in which the switch 38c closes. Hence, little or no closing force is present on the switch.

However, as shown in Figure 7, the magnet 38d of another similarly designed e-button 10d may supply sufficient force roughly perpendicular to the direction in which the switch 38c of e-button 10c closes. Hence, proximity may be detected, with the e-buttons operating as previously described to configure links therebetween. Preferably, the e-buttons 10c and 10d are shaped or labelled so as to indicate to a user the preferred proximity orientation of the e-buttons when configuring links.

Those skilled in the art will further recognise that the e-buttons, if sold separately, may be powered using an internal power supply initially inhibited by the proximity detection switch module. For example, a watch battery or the like may be inhibited from powering up the e-button by a suitably placed magnetic field supplied in or by the shelf packaging material. Once the e-button is removed, the switch opens and the internal power supply (not shown in the Figures) powers up the micro-controller and hence the e-button.

Those skilled in the art will additionally appreciate that the e-button may draw power from a host apparatus once it is engaged with said host apparatus.

In the above a radio system, devices and methods of configuring radio links are described. Whilst the above embodiments describe a system utilising e-buttons having magnetic proximity detection means (such as Reed switches and Hall switches) to detect and configure links between said e-buttons, those skilled in the art will recognise that other variations on proximity detection may be used.

For example, the e-buttons may be modified to physically attach to each other to provide proximity detection, or perhaps may incorporate a very short-range optical (for example infrared) circuit for detecting proximity and thus

initiating configuration of a wireless link. Similarly, those skilled in the art will appreciate that the means for engaging an e-button or device with a host apparatus may comprise infra-red or other non-physical short range engagement means, with data from the host apparatus being received by the engaged device and converted for longer range radio transmission.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of radio devices, host apparatus for receiving said devices and component parts thereof and which may be used instead of or in addition to features already described herein without departing from the spirit and scope of the present invention.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements.

CLAIMS

1. A method of configuring a radio link (20) between a first device (10a) and a second device (10b), each of which comprises radio means (30, 32), proximity detection means (38) and timing means (34), wherein the method comprises said proximity detection means detecting when said first and second device are proximate, timing means detects the duration of proximity and respective radio means configures a link in dependence on said proximity detection and the duration thereof.
2. A method as claimed in claim 1, wherein said configuring of said link comprises establishing a link.
3. A method as claimed in claim 1 or 2, wherein said configuring comprises removing a previously established link.
4. A method as claimed in claim 3, wherein said duration is two seconds.
5. A method as claimed in any preceding claim, wherein said establishing of said link comprises the radio means (30, 32) of each respective device exchanging pre-installed radio identifiers.
6. A method as claimed in any one of claims 1 to 4, wherein said establishing of said link comprises exchanging randomly generated radio identifiers.
7. A method as claimed in any preceding claim, wherein said devices further comprise indication means (36) to indicate the configuration status of a link.

8. A system having a first radio device (10a) and a second radio device (10b) operable to communicate via a configurable radio link therebetween, each device comprising proximity detection means (38) for detecting when said devices are proximate, timing means (34) for detecting the duration of said proximity and radio means (30,32) for configuring a radio link in dependence on said proximity detection and the duration thereof.

9. A system as claimed in claim 8, wherein said first (10a) and second device (10b) are adapted to physically connect with respective host apparatus (12a, 12b) and wherein said apparatus communicate with one another via said configurable radio link (20).

10. A radio device (10a,10c) operable to communicate via a configurable radio link (20) with a second device, the radio device comprising proximity detection means (38) for detecting when said devices are proximate, timing means (34) for detecting the duration of said proximity and radio means (30, 34) for configuring a radio link in dependence on said proximity detection and the duration thereof.

11. A radio device as claimed in claim 10, wherein said proximity detection means (38) comprises a reed switch (38a, 38c) and magnet (38b, 38d).

12. A radio device as claimed in claim 11, wherein said magnet (38b) has insufficient field strength to operate said reed switch (38a), and wherein said switch and magnet are arranged such that some of the magnetic field lines emanating from the magnet are perpendicular to the direction in which the device is used.

emanating from the magnet are substantially parallel to the direction in which the switch closes.

14. A radio device as claimed in claim 12 or claim 13, wherein said
5 timing means comprises a micro-controller (30) connected with said proximity
detection means (38).

15. A radio device as claimed in claim 14, wherein said radio means
comprises a digital transceiver (32) controlled by said micro-controller.

10

16. A radio device as claimed in any of claims 10 to 15, the device
being further adapted to physically connect with a host apparatus and provide
and receive data to and from said host apparatus.

17. A radio device (10a) for use with the system of claim 8 or claim 9,
15 comprising proximity detection means (38) for detecting proximity with a similar
radio device (10b), timing means (34) for detecting the duration of said
proximity and radio means (30, 32) for configuring a radio link in dependence
on said proximity detection and the duration thereof.

20

ABSTRACT**RADIO SYSTEM WITH RECONFIGURABLE LINKS**

5 A system comprising radio devices (10a, 10b), and methods of
configuring radio links between said devices, is described. The devices are
physically attachable/detachable from a host apparatus (12a, 12b). The
device provides a host apparatus with a radio link (20) to another host
apparatus also containing an appropriately configured device. To configure
10 the links, a consumer merely brings the devices into close proximity for a few
seconds. Proximity detection means (38) in the devices detect said proximity
and begin an automatic registration process to configure a link therebetween.
Links may be cancelled by repeating the process. Hence a consumer friendly,
flexible radio configuration scheme is provided enabling simple configuration of
15 one-to-one or one-to-many links, with the e-buttons offering a physical
reminder to the user of which apparatus has wireless capability.

(FIG. 4)

1/7

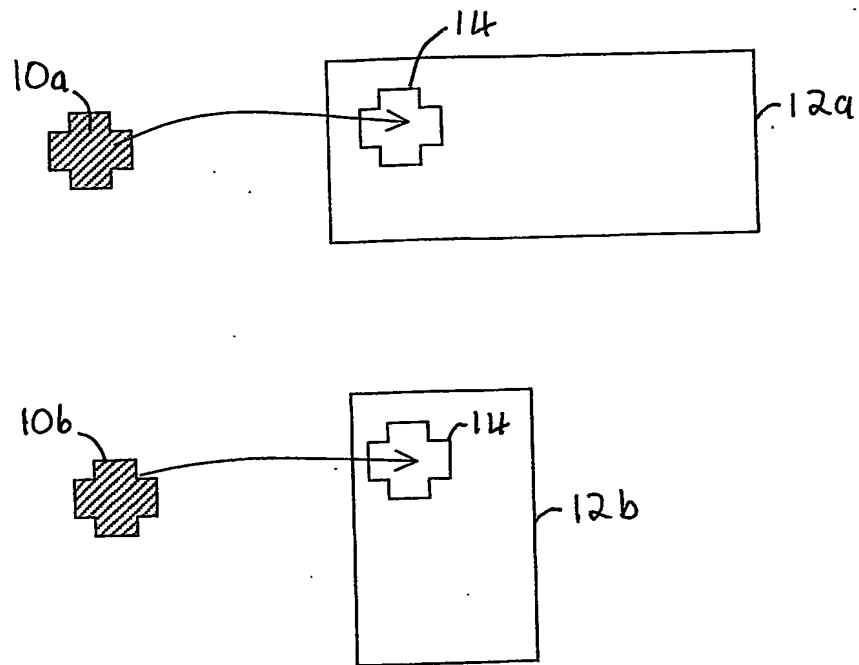


Fig. 1

2/7

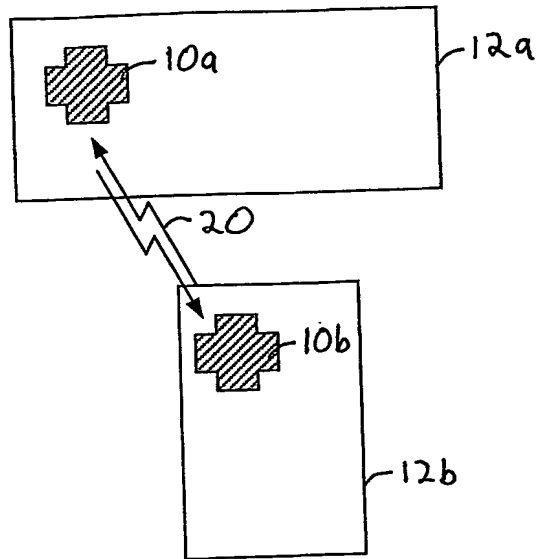


Fig. 2

3/7

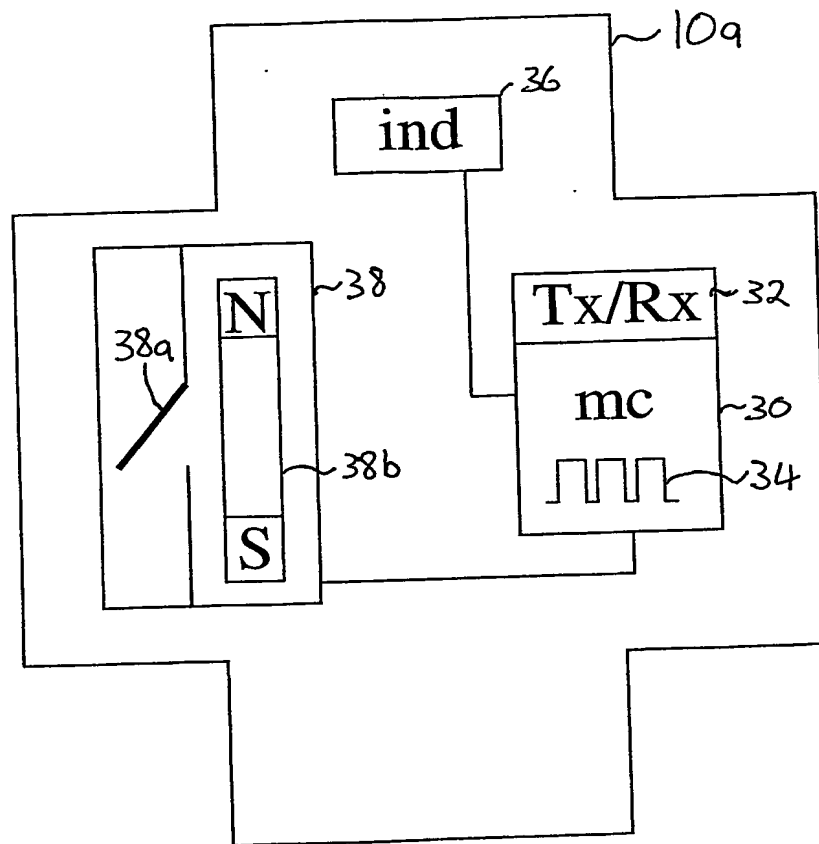


Fig. 3

4/7

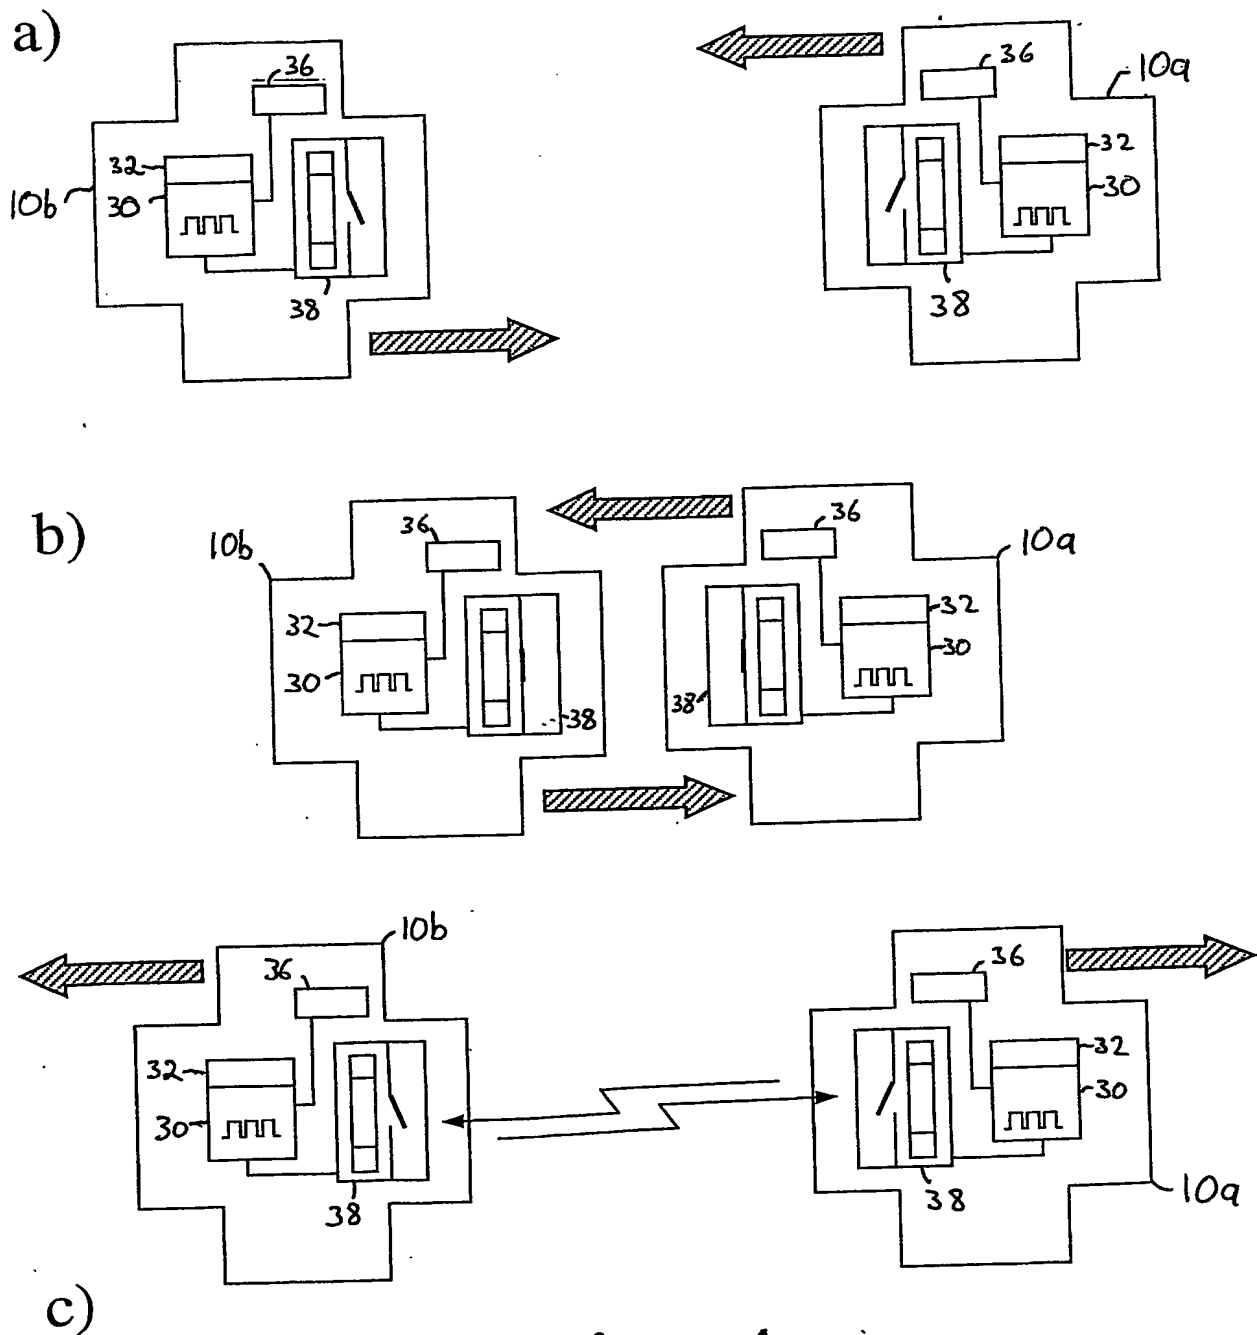


Fig. 4

5/7

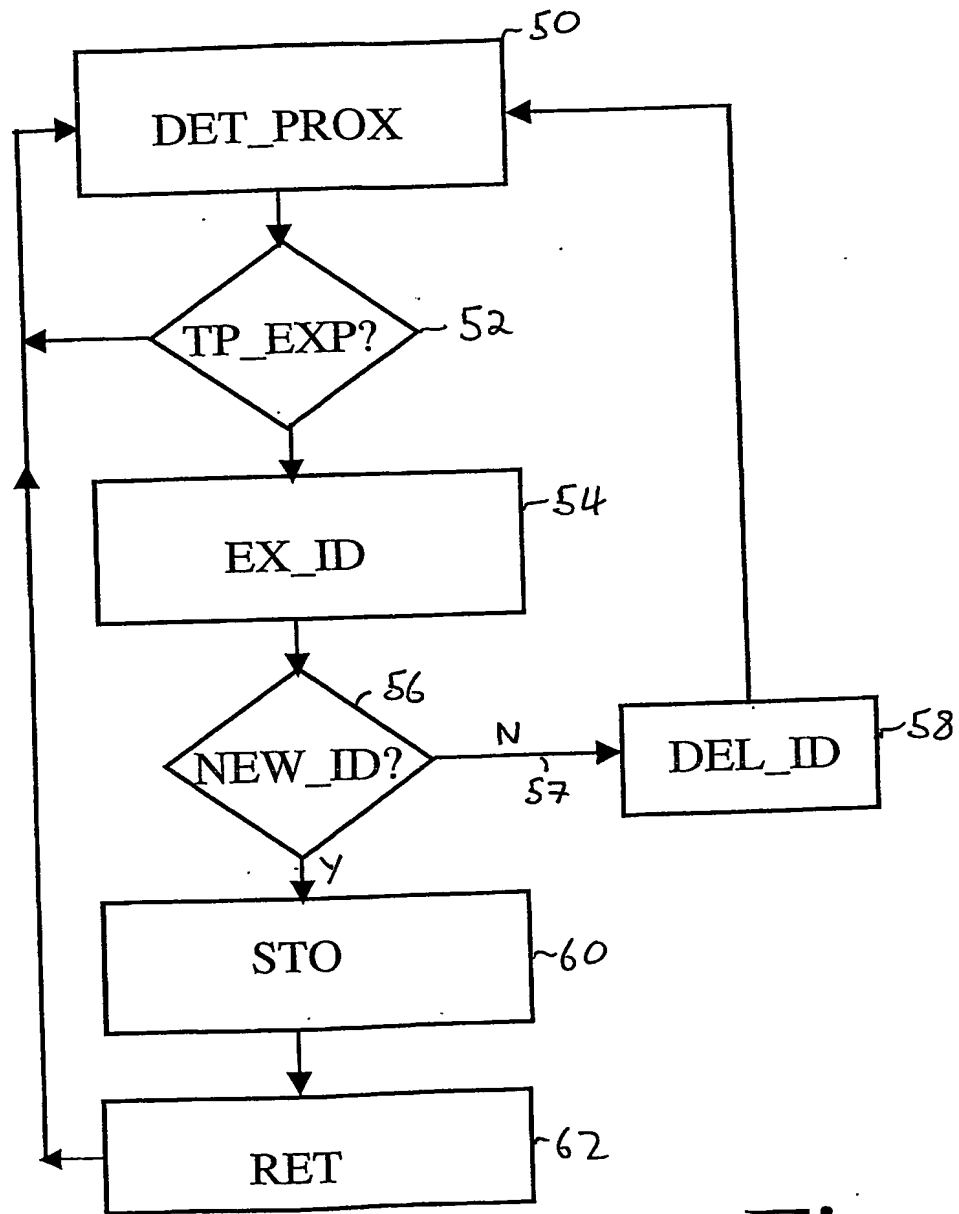


Fig. 5

6/7

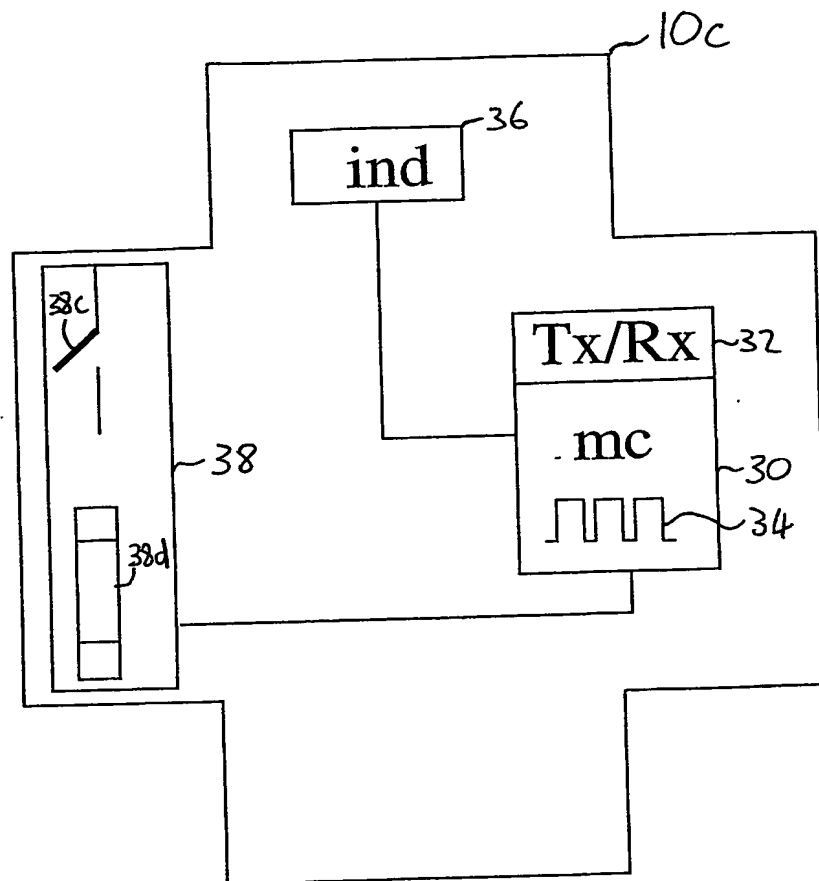


Fig. 6

7/7

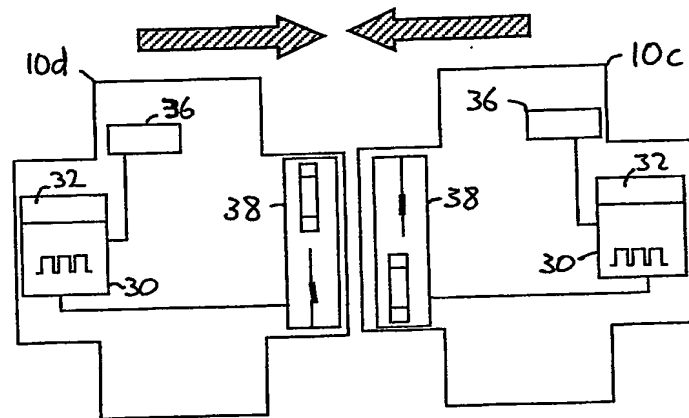


Fig. 7